



Thank you for your purchase of the Adtec EN-81 Encoder. This product is sold with optional modulator hardware packages. Configurations and indicators relevant to those add-on packages are noted here. If you purchased this product without a modulator, please ignore settings noted with an asterisks (\*).

The most recent firmware releases are available on our support website, [www.adtecdigital.com](http://www.adtecdigital.com). Advanced users can find direct API command help as part of the on-board web application, Help Tab.

## Quick View Status

For information on the core systems, use the down arrow on the front panel to scroll through these quick view menus.

Encoder Activity TMR Fault Mode Status Encryption

ENCODING:20.000M ! FAULT MODE! CAS:OFF  
SVC: 00001 "Service Name" Service Provider

Service ID Service Name Service Provider

Input: Resolution Frame Rate Source

I/ RES: 1920X1080 59i INP: SDI  
O/ RES: 1920X1080 59i B/T/ID:OFF/OFF/OFF/OFF

Output: Resolution Frame Rate Bars Status

Video PID PCR PID Codec Chroma

VID: 481 PCR:481 COD:H.264 CHR:420  
VRT:60000000b/s ENT:CABAC A/F:OFF

Video Rate Entropy Mode Auto Fill

## Audio Status

1:MU 384k 3:MU 384k 5:MU 384k 7:MU 384k  
2:MU 384k 4:MU 384k 6:MU 384k 8:MU 384k

## Audio PIDS 1-8

Audio 1:11300 3:11400 5:11500 7:11600  
PIDS 2:11300 4:11400 6:11500 8:11600

IP status RTP FEC Connector Transports 1 - 4

1: SEND ON BUR GIGE 3: OFF OFF OFF GIGE  
2: OFF OFF OFF GIGE 4: OFF OFF OFF GIGE

Modulator Status Mod FEC Power RollOff

TX:Enabled 32APSK\_9/10 Pwr:-30dB RO:25%  
Freq:1291MHz DVB-S2 Sym:15.00Ms Pilot:On

Frequency Mode Symbol Rate Pilot

Services	* RF Tx	IPTx	Video	Audio	PIDs	VBI	Profile	CAS	System
TS Mux Rate	Transmit	<< 1 - 4 >>	Input	Sampling Frequency	Transport Stream ID	Source	Select	Mode	Login
Program Number	Type	Mode	SDI Mode	SDI Clock Source	PMT PID	Closed Caption	Save	Clear Session Word	Duration
Service Name	Mode	Tx IP Address	CODEC	ECC Words	PCR PID	VITC Menu	Delete	Encrypt Session Word	Backlight Dim Delay
Service Provider	Frequency (MHz)	Tx Port	Entropy Coding	<< 1 - 8 >>	Video PID			User ID 1	Network Menu
Tables	Power (dBm)	DVB per IP	Chroma	Input	Audio 1 PID			User ID 2	Time Menu
Splice PID Active	Spectrum Inversion	RTP	Video Rate (b/s)	Mode	Audio 2 PID				NTP Menu
ASI Receive Mode	Fec Frame	FEC Mode	Autofill	Type	Audio 3 PID				Alarm
ASI Mode	Roll Off	FEC L	Latency	Rate	Audio 4 PID				SNMP Menu
Carrier ID Menu	Pilot	FEC D	Latency Trim	Level	Audio 5 PID				COM 2
Bars, Tones, ID Menu	Rate Priority	FEC TOS Bits	Fault Mode	Analog Aud. Level (1-2 Only)	Audio 6 PID				Feature Menu
	Symbol Rate	TOS	Fault Resolution	Sync	Audio 7 PID				Name
	Interface Rate	TTL	Aspect Ratio	Musicam Mode	Audio 8 PID				Firmware Version
	Carrier Mode	Tx Connector	AFD	IFB	Teletext PID				
	10 MHz Clock		GOP Type	SDI Pair	VITC PID				
	10 MHz Clock Comb.		GOP Structure		AMOL PID				
			GOP Size		Splice PID				
			SD Video Mode						
			3D-Sync Mode						

## Model Indicators:


- L-Band modulator
- IF modulator
- No modulator

## Special Keys:

Use the F2 button as a decimal.  
Press the F1 and F2 buttons simultaneously to jump to Modulator Line-up Mode. \*\*Detail on reverse.

**Reset:**  
Should you need to reset your device, you can do so via the front panel by pressing the MODE, ESCAPE and RIGHT ARROW keys simultaneously.

Units ship with the front panel logged in by default. If you become logged out and are prompted for a password, use the following key sequence for access.  
Press <Select> when panel displays 'User Login -- logged out'  
Press <Up arrow>  
Press <Select>  
Press <Enter>  
Press <Right arrow>  
Press <Enter>

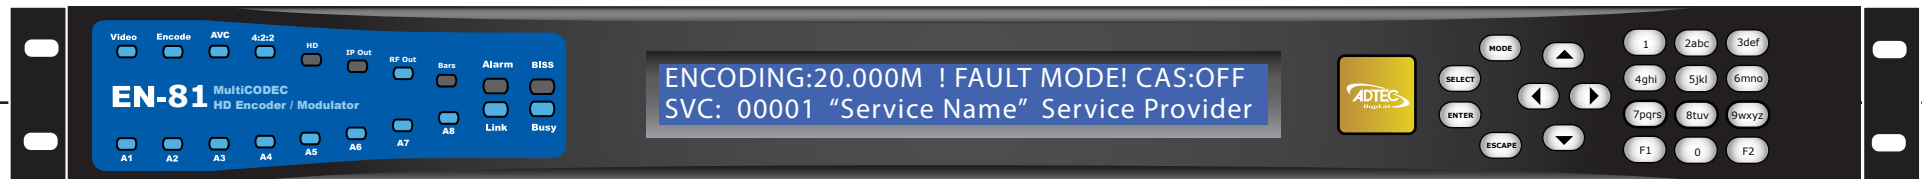

## Encoder LED Status

- Video**
- Off - If modulator is installed, no video is detected or ASI Receive mode is enabled.
  - On - Video is detected.
  - Blink - No video is detected and fault mode is active.
- Encode**
- Off - Device is not encoding. Idle State
  - On - Device is encoding.
- AVC**
- Off - MPEG 2 is selected for encode.
  - On - MPEG 4 (H264) is selected for encode.

- 4:2:2**
- Off - Encoding chroma type 4:2:0.
  - On - Encoding chroma type 4:2:2.
- HD**
- Off - Encoding standard definition.
  - On - Encoding high definition.
- IP Out**
- Off - Transport of IP via Ethernet or GigE is idle.
  - On - Transport of IP via Ethernet or GigE is active.

- \* RF Out**
- Off - Modulator is not transmitting.
  - On - Modulator is transmitting.
  - Blink - Modulator is in test mode.
- Bars**
- Off - B/T/ID options are disabled.
  - On - B/T/ID are enabled.
- A1 - A8**
- Off - Audio encoder cfg. is off.
  - On - Audio encoder cfg. is set to encode or passthru.

## System LED Status

- Alarm**
- Off - No system alarms
  - On - System alarm
- BISS**
- Off - No encryption set
  - On - Encryption active
- Busy**
- Off - No network activity
  - On - Network traffic present
- Link**
- Off - No network detected
  - On - Network communication active

## Front Panel Menu:

- Use Mode Button to move through top layer menus.
- Use arrows for navigation in submenus.
- Use select to enter into edit mode and enter to save selection.

## Getting Connected

To begin, you will need to connect to your EN-81 via ethernet directly, or by adding the EN-81 to your local area network. The default address for all Adtec devices is 192.168.10.48.

To connect directly to the device, make sure that your computer and the device have IP addresses within the same IP class range (ex. 192.168.10.48 for the device and 192.168.10.49 for your computer). If you need to change the IP address of the device, this can be done via the front panel, System > Network menu. Using a CAT 5 crossover cable, connect one end to your computer and the other to the Ethernet port found on the processor section of the back panel. (Some computers can auto negotiate the connection and a crossover may not be necessary.)

To add the device to a LAN, connect a standard CAT 5 Ethernet cable to your network router and then to the Ethernet port on the back of the device. If your network is DHCP enabled and you prefer that over a static IP, you can turn on DHCP for the device via the front panel, System > Network menu.

## Web-Based Control Application



Clicking on the unit in the Bonjour® list will re-route you to a login page. If you do not wish to use Bonjour, you can reach the device's web application by pointing your browser to the IP Address of the device. Ex. http://192.168.10.48/. You will be prompted for a username and password. The default username is 'adtec'. The default password is 'none'.

Adtec Digital has adopted zero-configuration networking technology, streamlining the setup and configuration processes for our products. The use of this technology enables automatic discovery of Adtec devices and services on an IP network. Used in tandem with the web-based control and configuration applications we can now provide 1-click access to any device.

By using the built-in Bonjour® locator in Apple's® Safari® browser or the plug-ins readily available for IE® or Firefox® browsers, users can locate all of the Adtec devices on a network by referencing the serial number on the back of the device.

**Have questions?** Each field or group of fields in our web-based application has a hint button associate with it. It contains information on use of the field or acceptable ranges.

## Getting Started

Once your encoder is accessible via network, you can set it up for transmission. You will need to adjust the configurations using the front panel or web UI. As you make changes, you will see the status sections on the left hand side of the web UI adjust. These status sections report the majority of the critical information needed for monitoring during a transmission. Each of these status menus can be collapsed by clicking on the icon. This allows you to view only that information which is most critical for you, but keeps a LED indicator visible for all sections at all times for alarms.

### EN-81

Temperature: 32(C)

**ENCODING Status:**  
 ENCODING 0 days 17:04:33.44  
 Bars/Tones/ID: OFF/OFF/OFF  
 Current Profile: [1]AmyTest

**Service Data:**  
 TransMux Rate: 72 (Mb/s)  
 Service Name: AdtecEN91  
 Service Provider: Adtec Digital  
 Encryption: OFF

**Modulator Status:**  
 NOT TRANSMITTING  
 Interface Rate: 7 (Mb/s)  
 Frequency: 1450 (MHz)  
 Type/Mode/FEC: DVB-S2/QPSK\_3/4  
 Occ. Bandwidth: 6 (MHz)

**IP Status:**  
 1 NOT TRANSMITTING  
 2 NOT TRANSMITTING  
 3 NOT TRANSMITTING  
 4 NOT TRANSMITTING

**Video Status:**  
 Video Detected: SDI  
 Resolution: 1280x720  
 CODEC/Chroma: H264 / 420  
 Frame Rate: 59p  
 AutoFill/Rate: ON / 67693000

**Audio Status:**  
 Frequency: 48000(Hz)  
 A1 RUNNING SDI/ENCODE MPEG 1 Layer 2 / STEREO / 192000(b/s)  
 A2 RUNNING SDI/ENCODE MPEG 1 Layer 2 / STEREO / 192000(b/s)  
 A3 RUNNING SDI/ENCODE MPEG 1 Layer 2 / STEREO / 192000(b/s)  
 A4 RUNNING SDI/ENCODE MPEG 1 Layer 2 / STEREO / 192000(b/s)  
 A5 RUNNING SDI/ENCODE MPEG 1 Layer 2 / STEREO / 384000(b/s)  
 A6 RUNNING SDI/ENCODE MPEG 1 Layer 2 / STEREO / 384000(b/s)  
 A7 RUNNING SDI/ENCODE MPEG 1 Layer 2 / STEREO / 384000(b/s)  
 A8 RUNNING SDI/ENCODE MPEG 1 Layer 2 / STEREO / 384000(b/s)

**Encoding Status:** These values indicate the encoder's state and displays alarms when a video loss event is detected.

**Service Data:** These values indicate the service or program data being used in your transmission as well as the total TMR output.

**\* Modulator Status:** Devices containing the optional modulator will display this status window indicating activity and critical uplink parameters.

**IP Status:** These values indicate the status of IP Egress including address, port and FEC parameters.

**Video Status:** The video status information is auto-detected per the input selected. Information such as resolution, chroma, framerate and video rate are included.


**Audio Status:** This section will display all audio status including bitrate, format and audio input selected.

## Modulator Line-UP \* (For access, press the F1 and F2 keys simultaneously.)

This feature enables the operator to quickly view and/or configure select modulator RF output parameters. The parameters available in this menu are;

**Carrier Mode:** [ PURE\_CARRIER or ON ] **Output Power:** [ in 0.5dB increments ]  
 Use SELECT Button to toggle. Press or hold UP or DOWN arrows to adjust.

**Transmit:** [ ENABLED or DISABLED ] **Output Frequency:** [ in 1.0MHz increments ]  
 Use ENTER Button to toggle. Press or hold LEFT or RIGHT arrows to adjust.

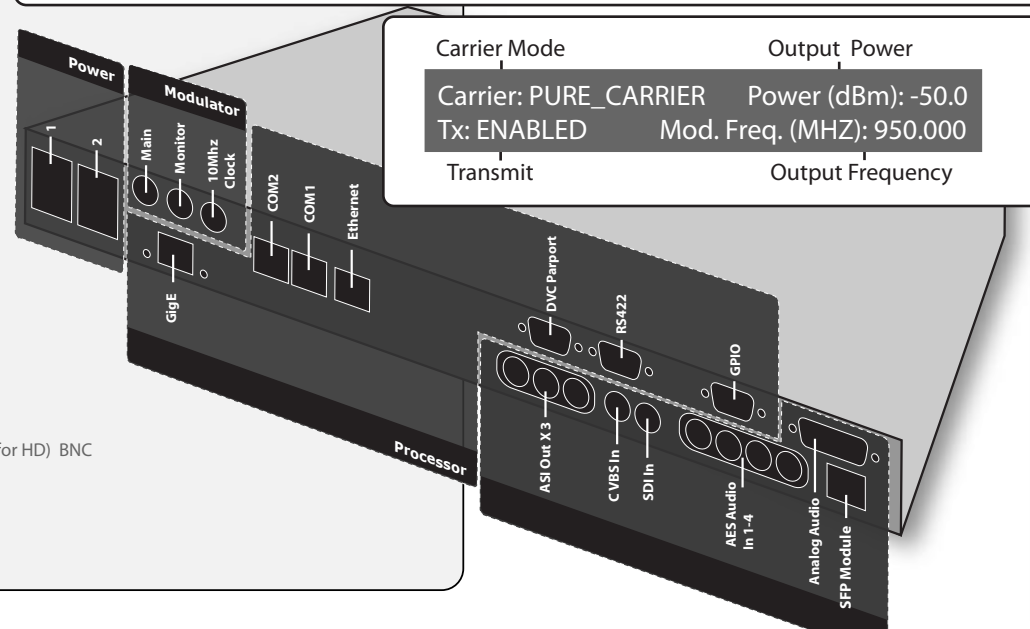

<b>Power</b>	Redundant AC Power, Standard 3 pin computer power plug (Auto range 70-240 VAC Input)
<b>Modulator (optional)*</b>	
<b>Main</b>	<b>RF output, 50 Ohm BNC</b> L-Band Model: Frequency range 950 MHz to 1.750 GHz, Power Level -50 to -7 dBm IF Model: Frequency range 50 MHz to 180 MHz, Power Level -30 to +5 dBm
<b>Monitor</b>	<b>RF output, 50 Ohm BNC</b> L-Band Model: Fixed power level at -45 dBm IF Model: Fixed power level at -45 dBm, fixed frequency at 1.08 GHz BNC 50 Ohm connector for external 10MHz reference input
<b>10MHz Clock</b>	
<b>Processor</b>	
<b>GigE</b>	MPEG2 or RTP multicast transport egress port (SMPTE 2022)
<b>COM2</b>	API Serial Communication Interface
<b>COM1</b>	Serial Port Used for Troubleshooting (Terminal)
<b>Ethernet</b>	10/100 base T ethernet interface (Monitoring/Management)
<b>DVC Parport</b>	9-pin parallel I/O interface for control systems
<b>RS422</b>	Not Currently Supported
<b>GPIO</b>	Tally and Control Port
<b>Encoder</b>	
<b>ASI OUT</b>	75 Ohm source ASI x3 per EN5000839. Up to 100 Mbps.
<b>CVBS In</b>	75 Ohm terminated Standard Definition Composite Video Input
<b>SDI In</b>	75 Ohm terminated Input, Video & Audio (SMPTE 259M for SD & SMPTE 292M for HD) BNC
<b>AES Audio In 1-4</b>	75 Ohm AES-3 per AES3-2003
<b>Analog Audio In</b>	Stereo Pairs 1 and 2 (600 Ohm Balanced)
<b>* SFP Module</b>	Single channel optical receiver module. SMPTE 297-2006 - Purchased Option.