

## Getting Started

Thank you for your purchase of the Adtec mediaHUB Pro. This quick start guide should help you with your initial setup. Further instructions are available via the manual integrated into the on-board software. You can view it by looking for the HELP tab once your unit is powered up and you are connected to the web-application. See back for more details. This manual and the most recent firmware are available on our support website, [www.adtecinc.com](http://www.adtecinc.com). Advanced users can also find direct API command help as part of the on-board web application.

## Front Panel LEDs:

### Encode

- Not Active
- Pre-rolling (Studio Encode)
- Encoding
- Transition (Encoding to Idling)

### Video

- No Video (Audio Only)
- Video Present
- Format Not Supported
- No Video Present

### Resolution

- Standard Definition (NTSC / PAL)
- 1080i HD
- 720p HD

### Audio 1 & 2

- Audio Not Enabled
- Audio Enabled

### Alarm

- No Encoder Alarm
- Encoder Alarm

## Front Panel Menus:


**MODE** Use Mode Button to move through top layer menus.

**< ^ v >** Use arrows for navigation in submenus.

**SELECT** Use select to enter into edit mode and **ENTER** enter to save selection.

System	Encoder Video	Encoder Audio	Transmit	PID	Table	Profile	Encrypt.
Login	Status	Samp. Freq.	Mux Rate	PCR	Table	Profile 1-10	Mode
Duration	Rate	A1 A2	Vid. AutoFill	Prog. No.	VBI Source		Clear Word
Network	Chroma	Sync	IP Destination 1-4	Map PID	Closed Cap.		Encrypt Word
Time	Input	Input		Vid. PID	Srv. Name		User ID 1
NTP	GOP	Mode		Aud. 1 PID	Srv. Provider		User ID 2
Alarm	GOP Str.	Type		Aud. 2 PID			
COM2	GOP Size	Bitrate		TS ID			
Firmware	Hue	Volume		AMOL			
	Bright.			Splice			
	Contr.			VITC Mode			
	Satur.			VITC PID			

Units ship with the front panel logged in by default. If you become logged out and are prompted for a password, use the following key sequence for access.  
 Press <Select> when panel displays 'User Login -- logged out'  
 Press <Up arrow>  
 Press <Select>  
 Press <Enter>  
 Press <Right arrow>  
 Press <Enter>

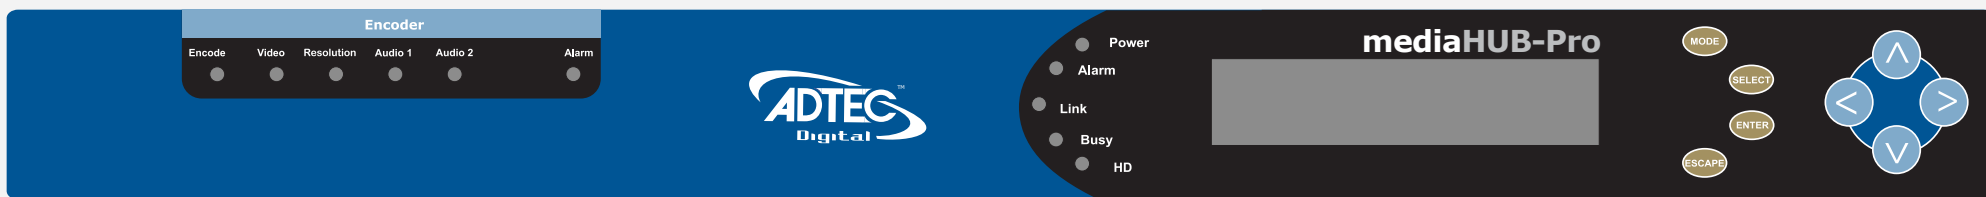

## System LED Status

### Power

- Power is OFF
- Power is ON

### Alarm

- No System Alarm
- Minor Alarm
- Major Alarm

### Link

- No Link Detected
- Link Active

### Busy

- No Network Traffic
- Network Traffic Present

### HD

- High Def. Encoding Disabled
- High Def. Encoding Enabled

## Front Panel Status

Video Resolution	Frame Rate	Video Bit Rate
1920x1080	29i	33.77M
1DD	192K	2DD 192K 48
Audio Input 1 & 2		Sampling Rate

